




ASUS Vivobook S500CA Battery Replacement

This guide shows you how to replace an Asus Vivobook S500CA battery.

Written By: Deric Huffman

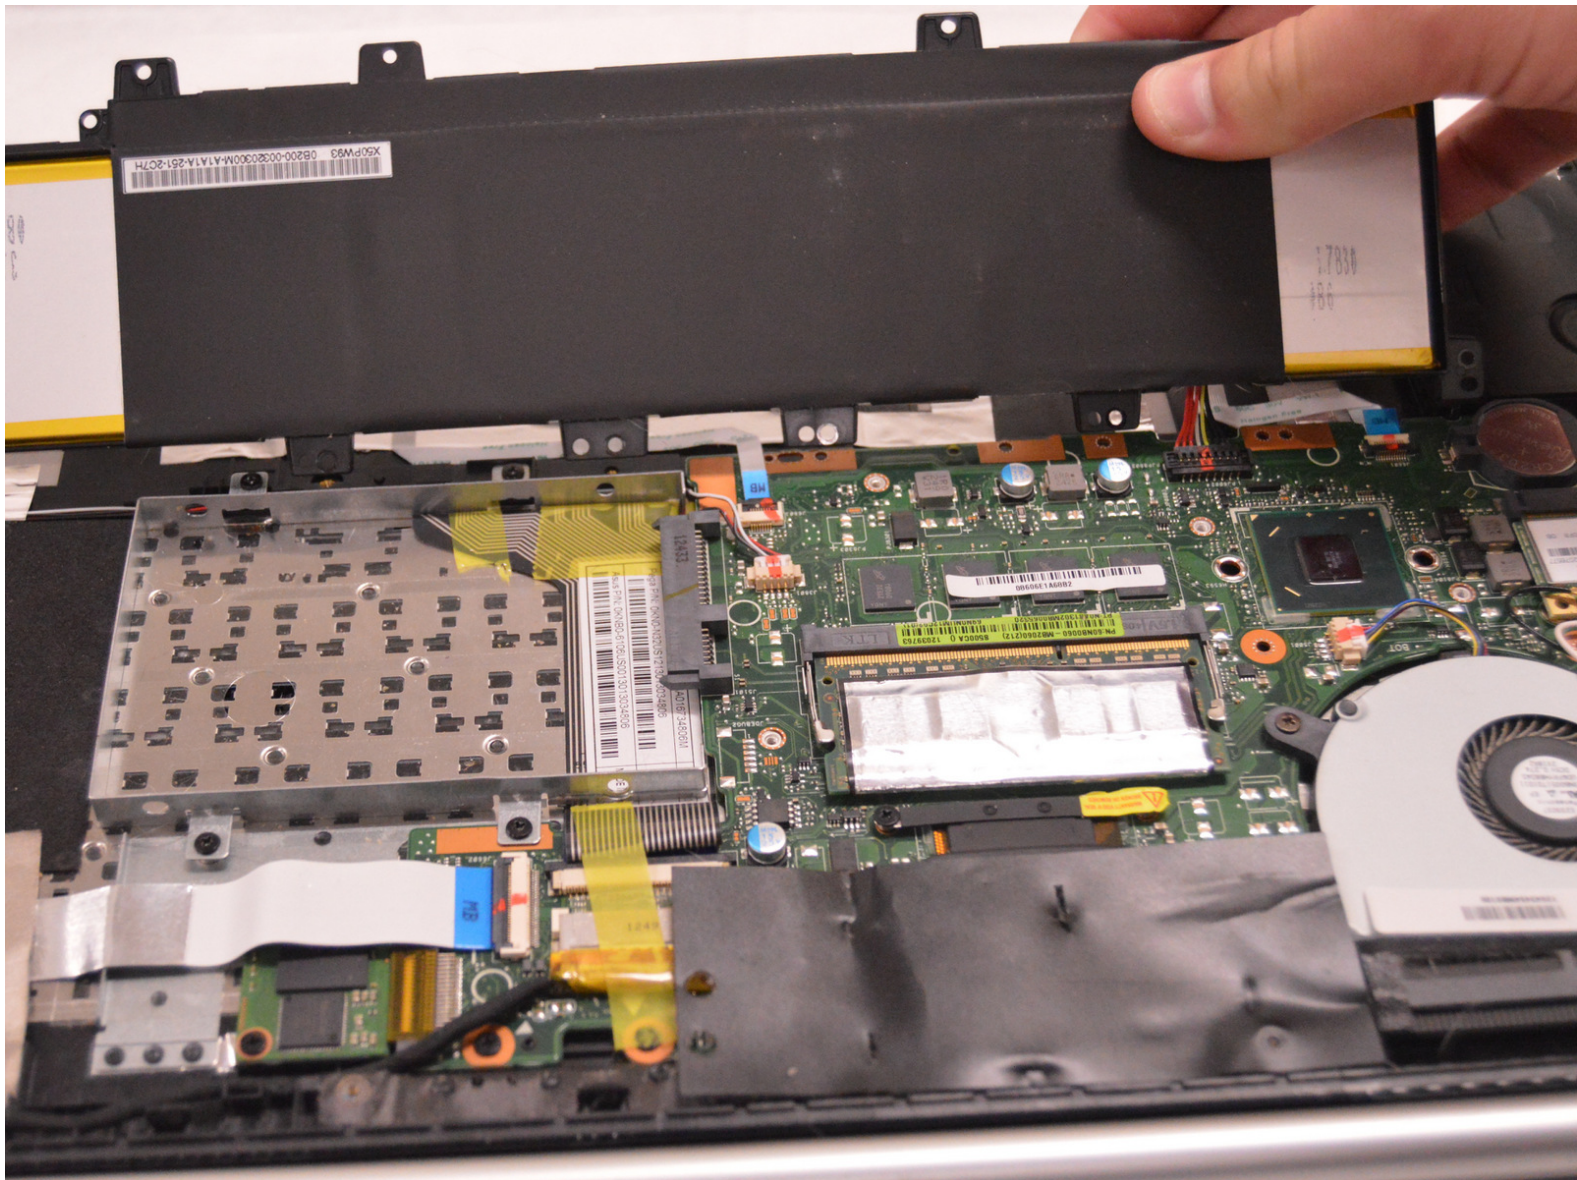

INTRODUCTION

If your battery is not holding charge or is completely dead, follow the guide to replace it.



TOOLS:


- [Philips Head Screwdriver: Size PH1](#) (1)
 - [Plastic Cards](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery




- Turn the device over to where the back plate is facing up.

Step 2

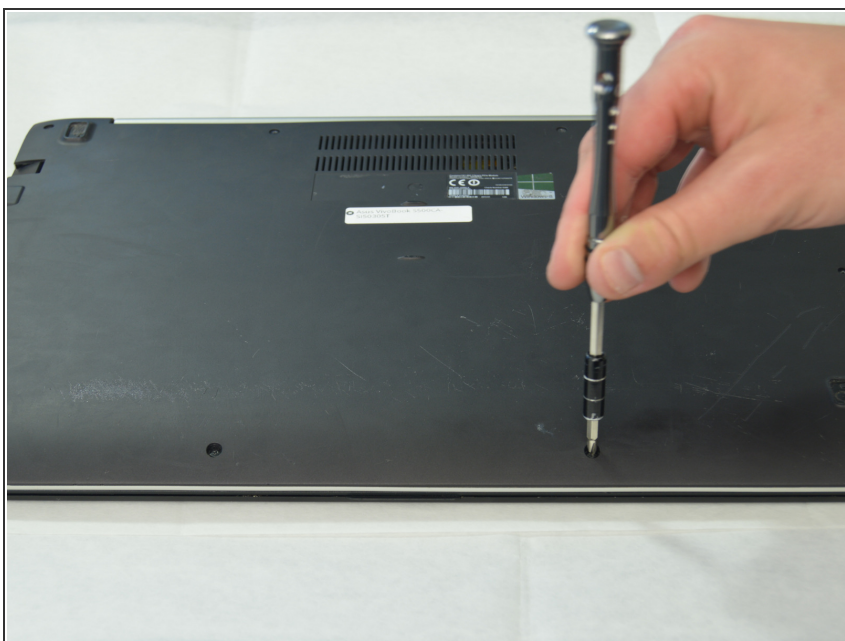


- Use a Philips Head PH1 screwdriver to remove 10 screws (3 1cm screws and 7 .5cm screws) around the perimeter of the back plate.
- ⓘ Place screws where they cannot be lost as they will be used to replace the back plate.

Step 3

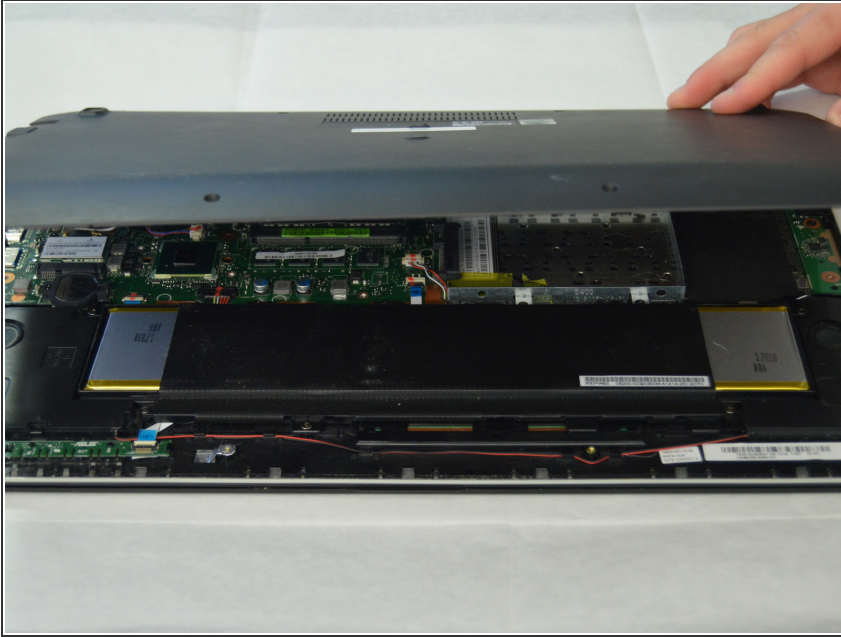

- Remove the back plate by lifting it straight up.

Step 4

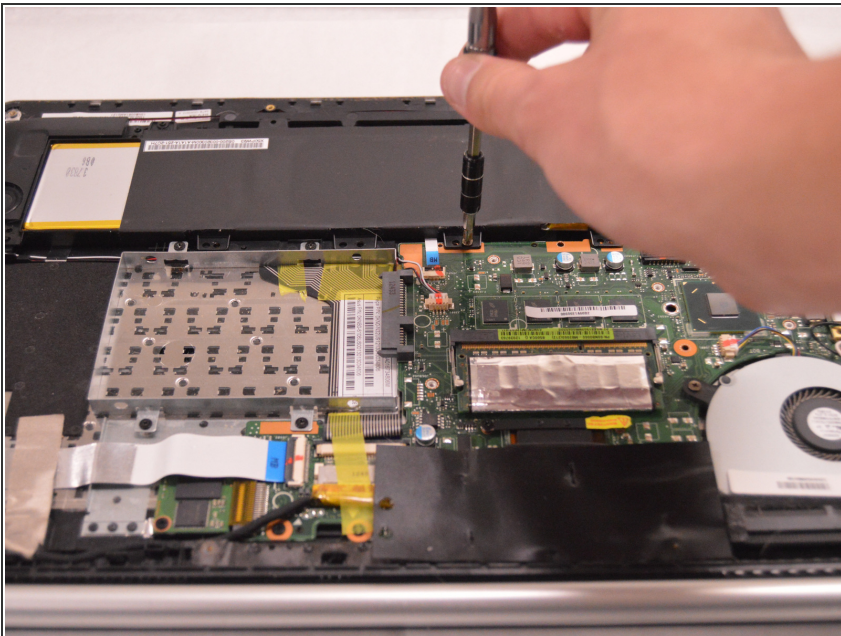


- Remove 9 (.5 cm) phillips screws around the edge of the battery.

Step 5



- Lift up the battery to reveal the battery terminal.

Step 6

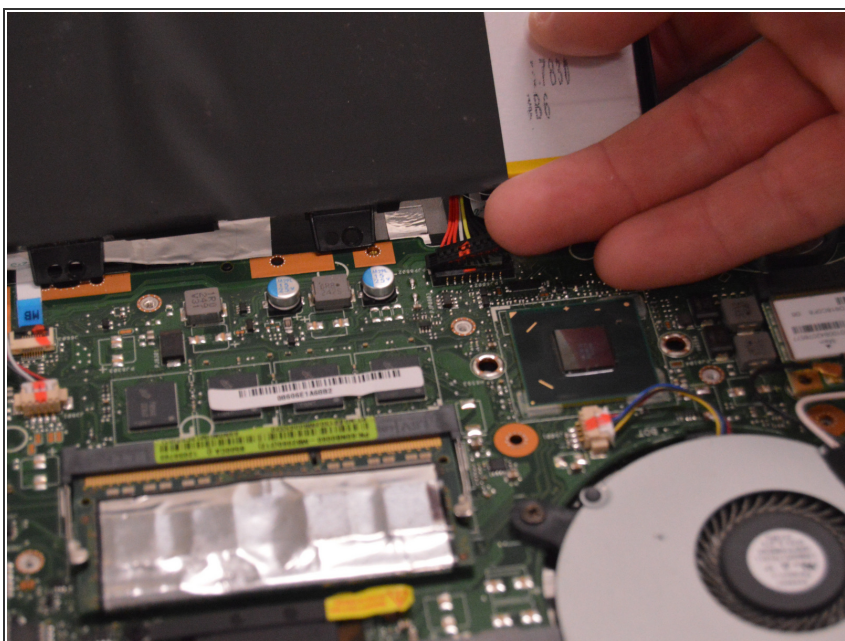

- Unclip the battery terminal by prying straight up on the sides of the connector to release the clip.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-03 01:35:26 PM.